

### Description

The P-55U Pump is an up-grade of the CCT- Premier Model P-55. The patented One Piece Steel Pump Body with Modular Cylinder Assembly represents the latest in pump design.

The Model P-55U Pump is designed to fit in Premier, Mega, McCord and Lincoln reservoirs.

### Features

- One Piece Steel Pump Body
- Modular Cast Iron Cylinder Assembly
- Pyrex Sight Glass with Protective Housing
- Hardened Steel Rocker Arm
- Optional Hardened Steel Roller Rocker Arm is available for High Pressure Applications
- Weatherproof Construction
- Suitable for use with Petroleum & Synthetic Lubricants
- 3/16", 1/4" and 3/8" Plunger Sizes available
- Box Suction Pumps (Vacuum Feed)
- Pressurized Suction Pumps with Sight Glass
- Pressurized Suction Pumps without Sight Glass (Blind Sightfeed)

### Specifications

Displacement:

3/16" Plunger (.010 Cubic Inches Per Stroke Maximum)

1/4" Plunger (.018 Cubic Inches Per Stroke Maximum)

3/8" Plunger (.041 Cubic Inches Per Stroke Maximum)

Maximum Working Pressure:

3/16" Plunger Roller Rocker Arm = 7,500 PSI

1/4" Plunger Standard Rocker Arm = 6,000 PSI

1/4" Plunger Roller Rocker Arm = 8,000 PSI

3/8" Plunger Standard Rocker Arm = 3,500 PSI

3/8" Plunger Roller Rocker Arm = 3,500 PSI

Maximum Oil Viscosity: 8,000 SUS


Inlet Thread (Blind Sightfeed Pumps): 1/8" NPTF

Outlet Thread: 1/8" NPTF

### Patent Number

Patent No. 5,662,023

### CCT Box Suction (Vacuum Feed), Standard Rocker Arm

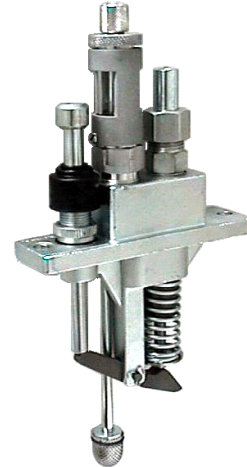

Part Number	Plunger Size	Max. Pressure
91200	1/4"	6,000 PSI
91201	3/8"	3,500 PSI

### CCT Pressurized Suction (Blind Sightfeed), Standard Rocker Arm



Part Number	Plunger Size	Max. Pressure
91202	1/4"	6,000 PSI
91203	3/8"	3,500 PSI

CCT Pressurized Suction w/ Tube to Front or Rear, and Shut Off Valve or Elbow Fitting



Part	Plunger	Maximum	Tube	Conn.
91204	1/4"	6,000 PSI	Rear	Valve
91205	3/8"	3,500 PSI	Rear	Valve
91206	1/4"	6,000 PSI	Rear	Fitting
91207	3/8"	3,500 PSI	Rear	Fitting
91208	1/4"	6,000 PSI	Front	Fitting
91209	3/8"	3,500 PSI	Front	Fitting

CCT Pressurized Suction w/ Tube to Front or Rear, Shut Off Valve or Elbow Fitting, and Roller Rocker Arm



Part	Plunger	Maximum	Tube	Conn.
91224	1/4"	8,000 PSI	Rear	Valve
91225	3/8"	3,500 PSI	Rear	Valve
91226	1/4"	8,000 PSI	Rear	Fitting
91227	3/8"	3,500 PSI	Rear	Fitting
91228	1/4"	8,000 PSI	Front	Fitting
91229	3/8"	3,500 PSI	Front	Fitting

CCT Pressurized Suction (Blind Sightfeed) with Roller Rocker Arm



Part Number	Plunger Size	Max. Pressure
92375	3/16"	7,500 PSI
92376	1/4"	8,000 PSI
92377	3/8"	3,500 PSI

CCT Pressurized Suction w/ Sight Glass, Side Inlet Tube Connection and Roller Rocker Arm




Part Number	Plunger Size	Max. Pressure
92168	3/16"	7,500 PSI
91490	1/4"	8,000 PSI
91504	3/8"	3,500 PSI

CCT Box Suction (Vacuum Feed), Roller Rocker Arm



Part Number	Plunger Size	Max. Pressure
92003	3/16"	7,500 PSI
91220	1/4"	8,000 PSI
91221	3/8"	3,500 PSI

CCT Pressurized Suction w/ Sight Glass, Side Inlet Elbow Fitting, and Roller Rocker Arm

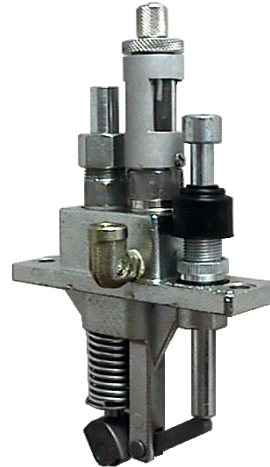

Part Number	Plunger Size	Max. Pressure
92169	3/16"	7,500 PSI
91230	1/4"	8,000 PSI
91231	3/8"	3,500 PSI

CCT Pressurized Suction w/ Sight Glass, Side Inlet Elbow Fitting



Part Number	Plunger Size	Max. Pressure
91210	1/4"	6,000 PSI
91211	3/8"	3,500 PSI



For Additional Information Contact:  
**C C Technology Inc.**  
 3201 West Wall St.  
 Midland, Texas 79701  
  
 Telephone (432) 520-6700  
 Fax (432) 520-6707  
 Http://www.cct.nu